
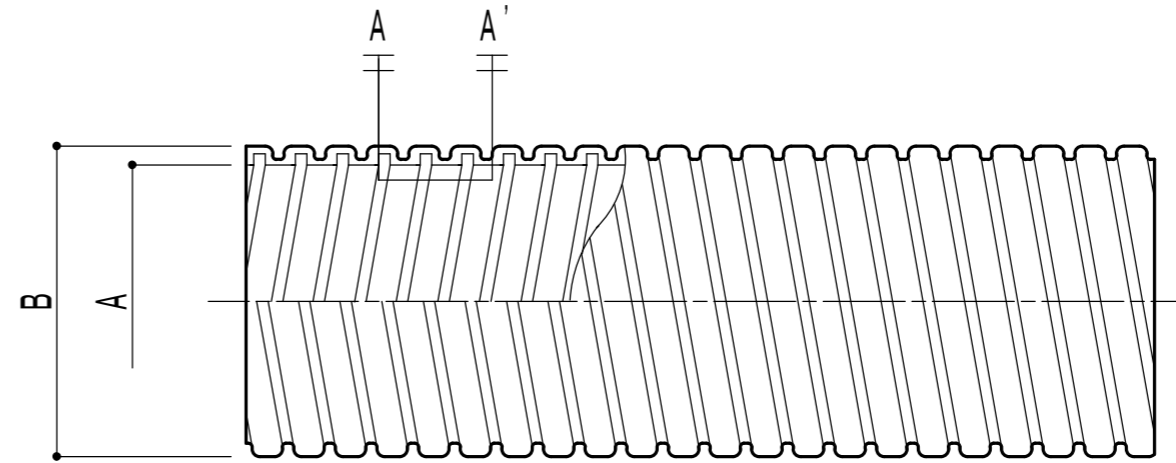


KLSV #16-54

耐油性(一般耐候性)/防水

改訂履歴 No.	改訂日 DATE	図番 DRG No.	摘要 REMARKS
1	2014-7-24	20140724-4	C A D
2	2015-7-31	20150731-1	#36 追加
3	2015-10-6	20151006-1	#42, 54 追加

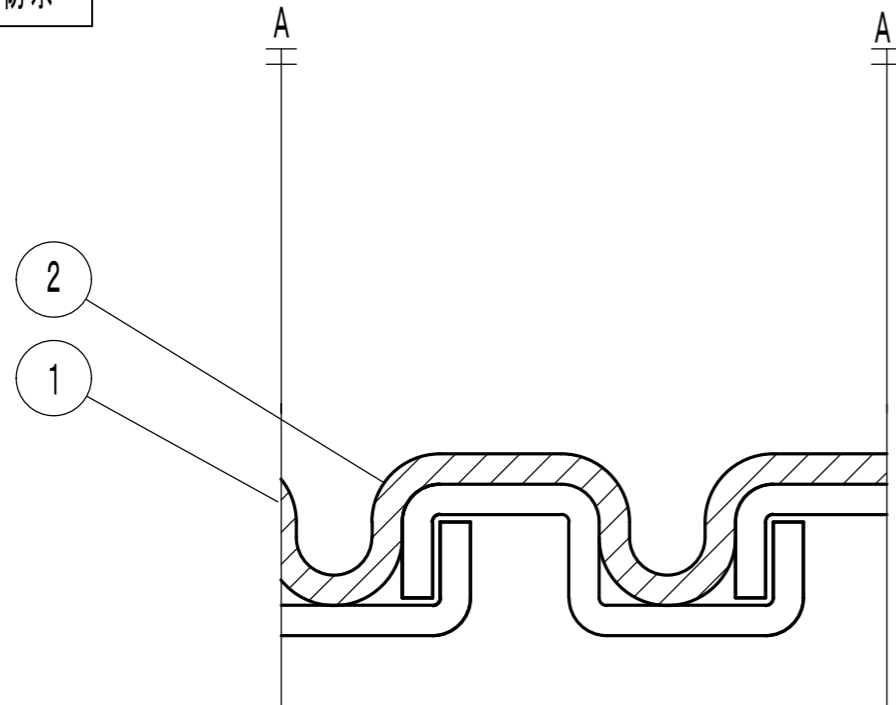

SIZE		CAT. No	最小内径	最大外径	最小曲げ半径(内側)		定尺	mm
INCH	呼び		A	B	繰返使用	固定使用	L (m)	
1/4	10							
3/8	12							
1/2	16	KLSV - 16	15.8	21.1	60	35	50	
3/4	22	KLSV - 22	20.8	26.5	70	40	30	
1	28	KLSV - 28	26.4	33.2	125	70	30	
1-1/4	36	KLSV - 36	35.0	42.0	145	80	20	
1-1/2	42	KLSV - 42	40.0	48.1	180	100	20	
2	54	KLSV - 54	51.3	60.1	320	175	20	
2-1/2	70							
3	82							
3-1/2	92							
4	104							
5	126							

2	塩化ビニール被覆	PVC	耐油性(一般耐候性)	
1	フレキシブルチューブ	SUS304		
記号 REF No.	部品名称 DESCRIPTION	材質 MATERIAL	摘要 REMARKS	所要数 PCS/SET
参考図 ORIGINAL DRG.	第三角法 3RD. ANGLE PROJECTION		用途 USE	耐油性(一般耐候性)/防水
社名 USER			名称 TITLE NAME	KLSV
名称 TITLE	KLSV	検図 CHECKED	K. W	
図番 DRG No.	2015073-1	設計 DRAWN	H. W	
尺度 SCALE	FREE	年月日 DATE	2015-10-6	
日本シーム工業 株式会社				